


Application

Designed to support both ends of self supporting multi-pair drop wire that uses a solid galvanized steel messenger wire that is integrated into the jacket in a figure 8 configuration

Used to splice galvanized steel messenger mid-span of a service drop

Features

Minimum holding strength is 90% RBS of wire specified

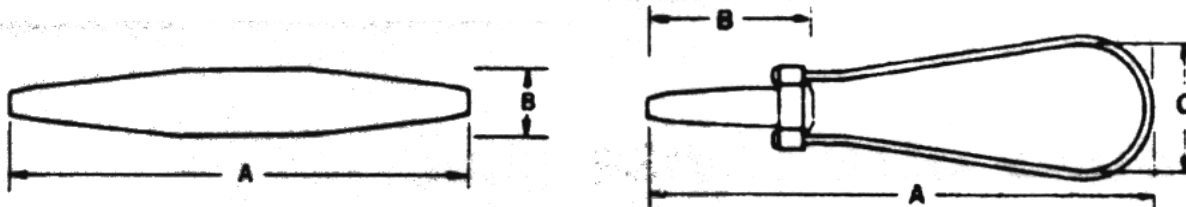

Wirelink Catalog Number	Dimensions (inches)		Wirewise Catalog Number	Dimensions (inches)			Wire Range		Standard Pack
	A	B		A	B	C	inches	mm	
5057 5057N	2.94	.39	5056	5.5	1.55	1.6	.062-.100 16 USSWG 15 USSWG 14 USSWG 13 USSWG	1.4-2.6 16 BWG 15 BWG 14 BWG 13 BWG	100
5059 5059N	2.94	.43	5058	5.5	1.47	1.6	.091-.114 13 USSWG 12 USSWG	2.3-2.9 13 BWG 12 BWG	100
5063 5063N	4.06	.55	5062	7.7	2.46	1.5	.120-.135 11 USSWG 10 USSWG	3.1-3.5 11 BWG 10 BWG	100
5039	9.00	1.03	5199	10.2	4.66	1.6	.140-.215 9 USSWG 8 USSWG 7 USSWG 6 USSWG 5 USSWG	3.7-5.5 9 BWG 8 BWG 7 BWG 6 BWG	50

Notes:

- 1) N = polyolefin covered Wirelink
- 2) 5056 available in .083 range only as 5056T